

FEATURES 特点

- Good for drilled or undrilled panels in wide range of sizes
- Scratch free by high speed belt feed system
- Applicable for various machines; ACM-700, NM-700HA, IT-700HA, DFL-680W(S), DFL-700W, DNM-700A

SPECIFICATIONS 规格

PANEL SIZE : Max: 700mm(27.56") x 700mm(27.56")
Min: 200mm(7.87") x 200mm(7.87")

PANEL THICKNESS : 0.4mm(0.016")~2.4mm(0.094")
* Maximum panel size may change subject to panel conditions.
Max.Stack Height: 480mm(18.90")

PROCESS SPEED: 23m/min. (60Hz) 18.4m/min. (50Hz)

PRODUCTIVITY: Approx. 1,200 panels/hour
(exclusive set-up time)
* based on 200mm(7.87") x 200mm(7.87") panel.

MACHINE DIMENSIONS(mm): 750L x 1,600W, 195H (29.5" x 63" x 47")

NET WEIGHT: Approx.470Kg (1.038 lbs)

FEATURES 特点

- Stack panels one by one to conveyor
- Scratch free by air floating system
- Capability of detecting full-stack
- Applicable for various machines; MRC-700A, MRX-700A, CMC-700A, ACM-700I, NM-700HA, IT-700HA, DFL-680W(S), DFL-700W

SPECIFICATIONS 规格

PANEL SIZE : Max:725mm(28.54") x 650mm(25.59")
Min:200mm(7.87") x 200mm(7.87")

PANEL THICKNESS : 0.4mm(0.016")~2.4mm(0.094")

MAX.STACK HEIGHT: 440mm(17.32")

MACHINE DIMENSIONS (mm): 839L x 1,660W x 1,110H
(34" x 66" x 44")

NET WEIGHT : Approx.350Kg (773 lbs)

FEATURES 特点

- Good for panels in variety and small quantity
- Compact type / Less floor space
- Gold edge bevels available(subject to cutter changes)
- Vacuum extractor equipped inside

SPECIFICATIONS 规格

PANEL SIZE: Max: 750mm(29.53") x 750mm(29.53")
Min: 80mm(3.15") x 80mm(3.15")

PANEL THICKNESS : 0.2mm(0.008")~3.2mm(0.126")
* Cutter should be changed according to panel thickness.

MACHINE DIMENSIONS (mm): 810L x 650W x 1,080H (32" x 26" x 43")

NET WEIGHT: Approx.150Kg(332 lbs)

FEATURES 特点

- High speed bevel/Less noise level/Less floor space
- Stable bevel portion
- Easy angle adjustments with dial gauge
- Vacuum extractor equipped inside

SPECIFICATIONS 规格

PANEL SIZE: Max.Length: 600mm(23.62")
Min.Height: 50mm(1.97")

PANEL THICKNESS : 0.8mm(0.031")~3.2mm(0.125")

FEED SPEED : 4.57~9.14m/min.

DEPTH OF BEVEL(ANGLE) : 20°~45°

* Above data may change subject to panel conditions.

ACCURACY: Straightness: within $\pm 0.15\text{mm}(0.005\text{"})$
* based on 1.5mm(0.06") thick unclad panels.


MACHINE DIMENSIONS (mm) : 860Lx560Wx1,010H (33.8"x22"x39.7")

NET WEIGHT : Approx.250Kg (552 lbs)

TNF-700 AUTO LOADER 自动投板机



UT-700 UT-700P AUTO UNLOADER 自动收板机

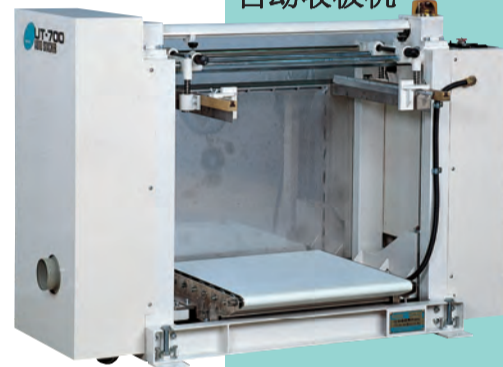

AF-100 EDGE BEVELER 磨边机



SF-2000 GOLD-EDGE BEVELER 金手指磨边机

